


**LED Flood Light: 50 Watts 4,000 Lumens**

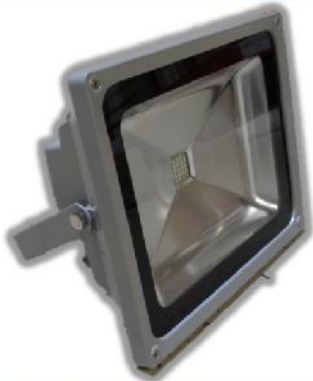

**SPECIFICATIONS**

**Item# FL-DLC-50W-5K-BRA**

Wattage Rated:	<b>50 Watts</b>
Lighting System:	Samsung LA351A/B 20PCS
Input Voltage:	AC100-277V ~/ 0.6A max
CCT:	<u>5000K-5500K standard</u>
Lumen Output	4,000 Lumens
Frequency Range:	50Hz~60Hz
Driver:	Eptronics s LP50W-36-C1400
CRI:	76Ra
Power Factor:	>0.95
THD:	< 17.4 %
Beam Angle:	100°/ 50° Degrees
Light Distribution:	Symmetric/ Circle
Operating Temperature:	-22°F to 104°F
IP Grade:	IP65 Insulation Class 1
<b>Lifespan:</b>	<b>50,000 hours</b>
Housing Material:	Aluminum
Glass Material:	3.5mm lead-free toughened glass.
Dimensions & Weight:	L 11.41" x W 9.25" x D 6.69"
Weight:	9.92 Lbs.
<b>Manufacturer Warranty:</b>	<b>5 Years</b>
<b>Main Certification:</b>	<b>cUL, UL, RoHS, DLC</b>

**Mounted Height**

At 3.28 feet Height =  
 At 6.56 feet Height =  
 At 9.84 feet Height =  
 At 13.12 feet Height =  
 At 16.4 feet Height =

**Average Illumination 50W Flood**

670 lux - 7.41 ft. diameter range  
 168 lux - 14.82 ft. diameter range  
 75 lux - 22.24 ft. diameter range  
 42 lux - 29.65 ft. diameter range  
 27 lux - 37.07 ft. diameter range