





WALL PACK DOWN LIGHT SERIES

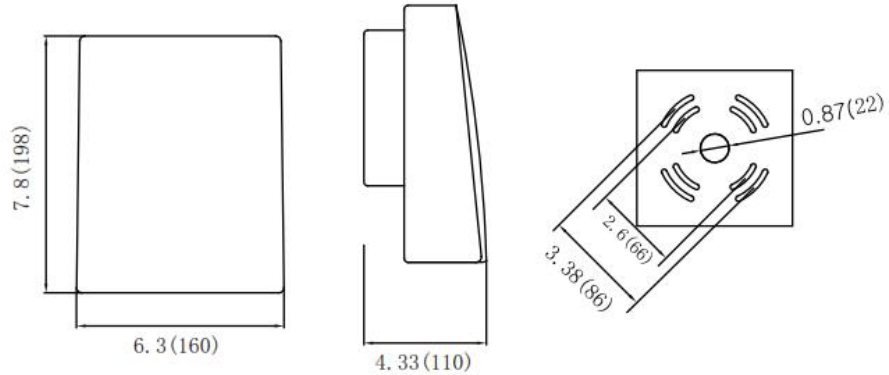

DIMENSION

Model	Input Power	ETL	DLC	CCT	Input Voltage	CRI	Lumens at 5000K	Power Factor	THD	Installation
WP-DWN-20W	20W	YES	YES	2700-6500K	100-277 V 50/60HZ	>75	1,900 L M	>0.92	<15%	Wall Mount Or U-Bracket
WP-DWN-30W	30W	YES	YES	2700-6500K	100-277 V 50/60HZ	>75	2,600 L M	>0.92	<15%	Wall Mount Or U-Bracket
WP-DWN-40W	40W	YES	YES	2700-6500K	100-277 V 50/60HZ	>75	3,400 L M	>0.92	<15%	Wall Mount Or U-Bracket

Model	WEIGHT (lbs)
WP-DWN-20W	3.5
WP-DWN-30W	3.9
WP-DWN-40W	4.2

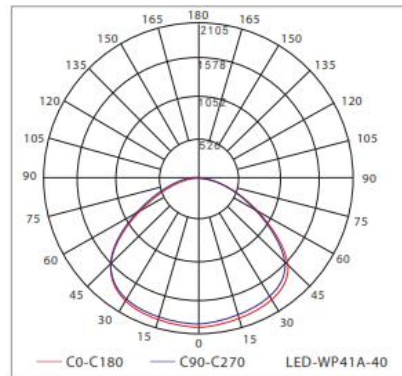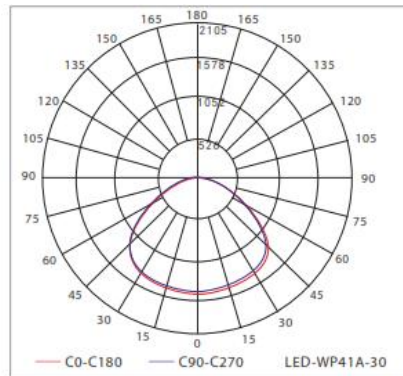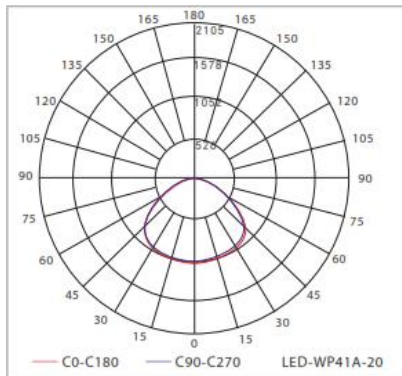

FEATURES - APPLICATIONS - CERTIFICATIONS

- *Motion sensor & photocell available.
- *Different mounting options available.
- *High pressure die cast aluminum housing.
- *Anti-static powder coat finish.
- *IP Rating : IP65

- *Highly efficient thermal conductive heat dissipation system.
- *High efficient Cree COB ensures excellent performance.
- *Quick and easy installation and easy maintenance.
- *Hospitals, Schools, Warehouses, Commercial, Industrial, etc.

***CE, cETL, ETL, DLC certified (Good for Utility Company Rebates)**